## FRIGIDAIRE.

# Freestanding Range

FFEF3052TS



### Signature Features

#### **Quick Boil**

Get meals on the table faster with our 3,000W element — water boils faster than the traditional setting.

# SpaceWise® Expandable Elements

Flexible elements expand to meet your cooking needs - big or small.

#### **Keep Warm Zone**

Keep food warm until everything — and everyone — is ready.

#### **Extra-Large Window**

Check on the status of your dish without having to open the oven door.

#### 30" Electric

#### **Product Dimensions**

 Height (Max.)
 47"

 Width
 29-7/8"

 Depth (Including Handle)
 28-1/2"

#### More Easy-To-Use Features

Store-More™ Storage Drawer With the Store-More™ Storage Drawer,

With the Store-More™ Storage Drawer, you will have extra space to store your cookware.

Built with American Pride

Designed, engineered and assembled in the U.S.A.

#### Manual Clean Oven

#### Available in:




Stainless


| Elements    | Size                | Watts           |
|-------------|---------------------|-----------------|
| Right Front | 6"/9"<br>Expandable | 1,400/<br>3,000 |
| Right Rear  | 6"                  | 1,200           |
| Left Front  | 9"                  | 3,000           |
| Left Rear   | 6"                  | 1,200           |
| Center      | Keep Warm<br>Zone   | 100             |

# Freestanding Range

FFEF3052TS **30" Electric** 

| Features                                      |   |
|---|---|
| Oven Control/Timing System                    | Ready-Select® Controls                    |
| Surface Type                                  | Black Ceramic Glass                       |
| Window  | Extra-Large                               |
| Exterior Door Finish                          | Stainless Steel                           |
| Handle Design                                 | Stainless Steel                           |
| Exterior Finish (Side Panels)                 | Black                                     |
| Convection System                             |   |
| Oven Cleaning System                          | Manual Clean                              |
| Drawer Functionality                          | Storage                                   |
| Oven Controls                                 |   |
| Bake  | Yes                                       |
| Broil   | Variable (High/Low)                       |
| Add-a-Minute                                  |   |
| Delay Start                                   |   |
| Self-Clean                                    |   |
| Quick Clean Option                            |   |
| Delay Clean                                   |   |
| Kitchen Timer                                 | Yes                                       |
| Timed Cook Option                             | Yes                                       |
| Auto Oven Shut-Off                            |   |
| Cooktop Features                              |   |
| Right Front Element (Watts)                   | SpaceWise® Expandable 6"/9" - 1,400/3,000 |
| Right Rear Element (Watts)                    | 6" - 1,200                                |
| Left Front Element (Watts)                    | 9" - 3,000                                |
| Left Rear Element (Watts)                     | 6" - 1,200                                |
| Center Element (Watts)                        | 100 - Warm and Serve                      |
| Hot Surface Indicator Light                   | Yes                                       |
| Element "On" Indicator Light                  | Yes                                       |
| Coil Cooktop/Drip Bowls                       |   |
| Oven Features                                 |   |
| Capacity (Cu.Ft.)                             | 4.9                                       |
| Oven Light                                    | 1   |
| Hidden Bake Element                           |   |
| Rack Configuration                            | 2 Standard                                |
| Baking System                                 | Even Baking Technology                    |
| Broiling System                               | Vari-Broil™ Hi/Lo                         |
| Bake Element/Broil Element (Watts)            | 2,600/3,000                               |
| Specifications                                |   |
| Oven Interior (H x W x D)                     | 19-3/4" x 23" x 18-3/4"                   |
| Power Supply Connection Location              | Middle Bottom Rear                        |
| Voltage Rating                                | 240V/208V/60Hz                            |
| Connected Load<br>(kW Rating) @ 240/208 Volts | 12.5/9.5                                  |
| Minimum Circuit Required (Amps)               | 40  |
|   |   |

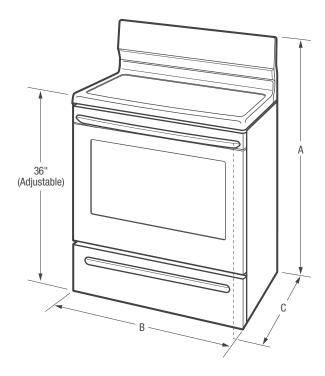





| Product Dimensions         |         |
|----------------------------|---------|
| A-Height (Max.)            | 47"     |
| B-Width                    | 29-7/8" |
| C-Depth (Including Handle) | 28-1/2" |
| Depth with Door Open 90°   | 45"     |


| Cabinet Cutout Dimensions |     |
|---------------------------|-----|
| Height (Standard)         | 36" |
| Width (Min.)              | 30" |
| Depth (Min.)              | 24" |

Accessories information available on the web at frigidaire.com

Shipping Weight (Approx.)

165 Lbs.

FFEF3052TS 30" Electric

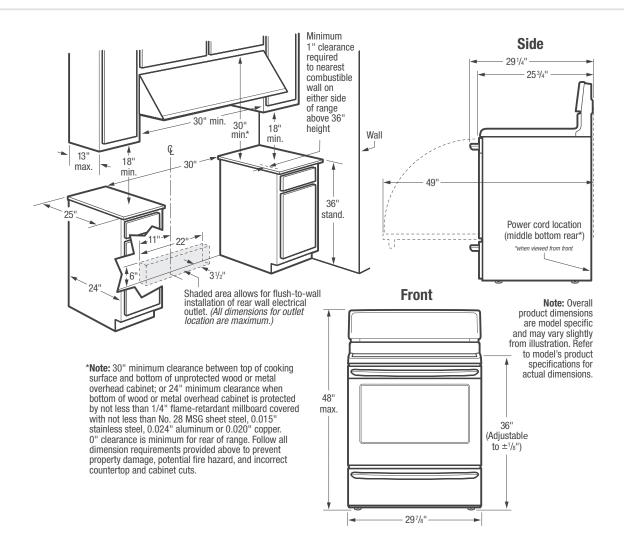

#### **Freestanding Range Specifications**

- Product Shipping Weight (approx.) 165 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) @ 240/208 Volts = 12.5/9.5kW
- Recommended Circuit Breaker 40 Amps
- · Always consult local and national electric codes.
- Make sure wall coverings around range can withstand heat generated by range.
- · Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum 1" clearance required from edge of rangetop to nearest combustible wall on either side of range above 36" height.

- Allow 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

